




# ARMFLEX

## Rubber Flexible Joint

Item No. **AMU**

Name **TWIN-SPHERE CONNECTION**  
With Union Thread to BSPT

Symbol	Part	Engineering Material
1	Union	Malleable Iron
2	Reinforcing Cloth	Nylon Fabric
3	Elastomer	Synthetic Rubber

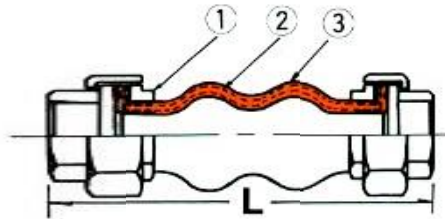

### Dimension (mm)


Item	L	Allowable Movements			
		Axial		Transverse Movement	Angular Deflection
		Compression	Elongation		
15(1/2")	203mm	22mm	6mm	22mm	30°
20(3/4")	203	22	6	22	30°
25(1")	203	22	6	22	25°
32(1-1/4")	203	22	6	22	25°
40(1-1/2")	203	22	6	22	20°
50(2")	203	22	6	22	25°
65(2-1/2")	225	22	6	22	12°
80(3")	225	22	6	22	10°

### Allowable Movements

1. Axial Compression    2. Axial Elongation    3. Transverse Movement    4. Angular Deflection



- Operating Pressure    16 Bar
- Burst Pressure    50 Bar
- Vacuum Rating    400 mm Hg
- Temperature    -20°C ~ 100°C

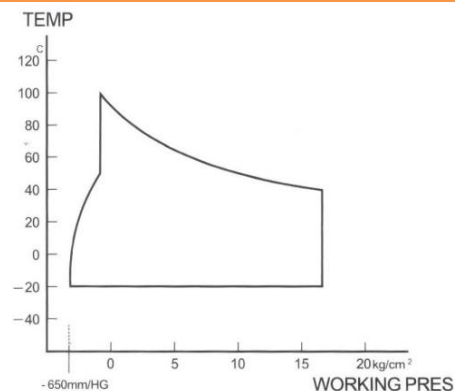

Country of Origin: Taiwan



海聯五金有限公司  
Hoi Luen Hardware Co., Ltd

E: Sales@hoiluenhardware.com    W: www.hoiluenhardware.com

Tel: (+852) 23887282